THERMAL TRANSFER RIBBON

R130

STANDARD RESIN

FLAT HEAD / NEAR EDGE

PRODUCT DESCRIPTION

R130 is a Standard Resin ribbon for Flat Head and Near Edge printers. Excellent darkness is more suitable for printing high quality and sharp barcodes. It provides superior abrasion and scratch resistance on paper and synthetic substrates.

RECOMMENDED SUBSTRATES

Uncoated paper, Coated paper, Goldvac, Synthetic paper, Polypropylene, Polyethylene, Polyester, BOPP.

PERFORMANCE CHARACTERISTICS

- Excellent media adaptability;
- Excellent resistance to smudge and scratch;
- Excellent printing quality at high-speed.

RESISTANCES

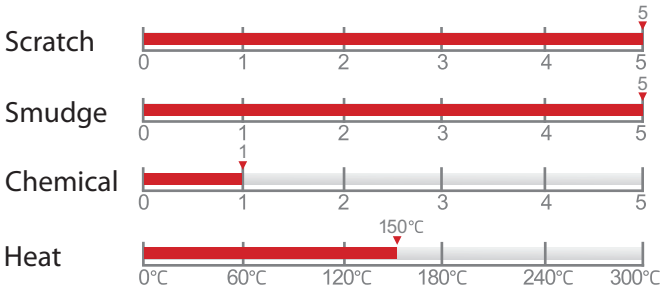

NOTICE: In each case, a print test must be performed!
Quality of printing depends on:
of surface type it is printed on, printer model and print head type.

APPLICATION AREAS

RIBBON SPECIFICATION

Description	Technical Specifications
Ink	Resin
Color	Black
Base film Thickness	4,5 µm
Ribbon Thickness	6,9 µm
Max. printing speed	6 ips (152,4 mm/sec)
Ink Melting point	92 °C

RIBBON STORAGE CONDITIONS

Temperature	5 °C to 35 °C
Humidity	20% to 80% relative humidity
Light	Avoid direct sunlight

CERTIFICATIONS / DIRECTIVES

- **REACH / SVHC Free**
- **RoHS**
- **Halogen Free**
- **ISEGA**

PRODUCT LABELING SPECIALISTS
www.printmark.lt